

Hillmar

Hillmar Industries Ltd.

7371 Vantage Way
Delta, BC V4G 1C9
P:604 946-7115 F:604 946-0329
info@hillmar.com www.hillmar.com

CABLE REEL DACR
DACR-ME25-GB50DD-ENC4-20-50
SPECIFICATION SHEET
SLS & MKTG
ENGLISH

Sheet Number:

Job Number:

Form Number:

629-863-75905PT

Company / Project Reference:


Date.:

Page.:

Document Package No.:

Rev.:

Inventor Drawing

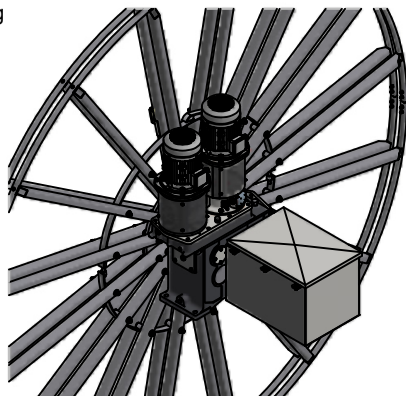

FEATURE	CODE
Drive Assy Control	DACR
Magnetic Coupling	ME25
Gearbox Dual Drive	GB50DD
SS304 Slipping Enclosure	ENC4
Number of Slings	20
Magnetic Coupling Torque Nm	50 (50)

Example for ordering

DACR-ME25-GB50DD-ENC4-20-50



TECHNICAL DATA

Motor Size	5.5 kW
Spool Sizes Available	4.0m to 7.0m
Gearbox Hollow Shaft	90mm
Gearbox Drive Torque Nm	8000
Gearbox Max Overhang Load	75kN
Rotary Switch Ratio	Contract Specific
Drive Weight Excluding Spool	866kg
Spool Weight	Contract Specific
Mounting Holes	4 x Ø27
Mounting Bolts	4 x M24 GR10.9

NOTES

For Other Reel Types refer to one of the following sections:

- Flat Cable Reel
- Hose Reel
- Control Reel
- Vector drive Reel
- High Speed Reel

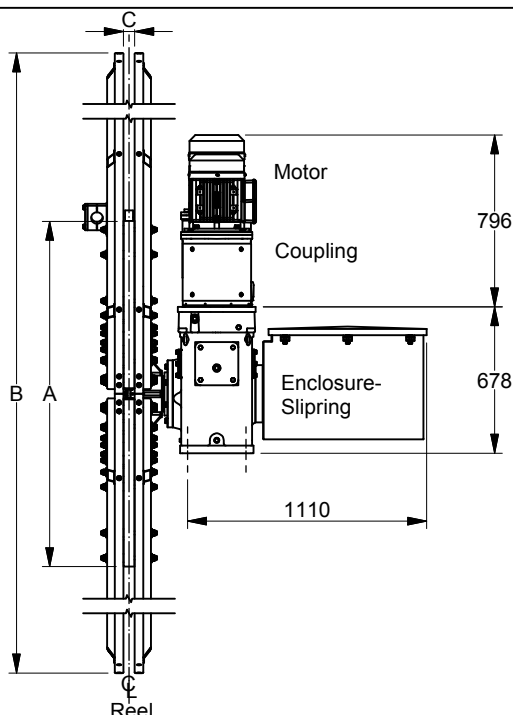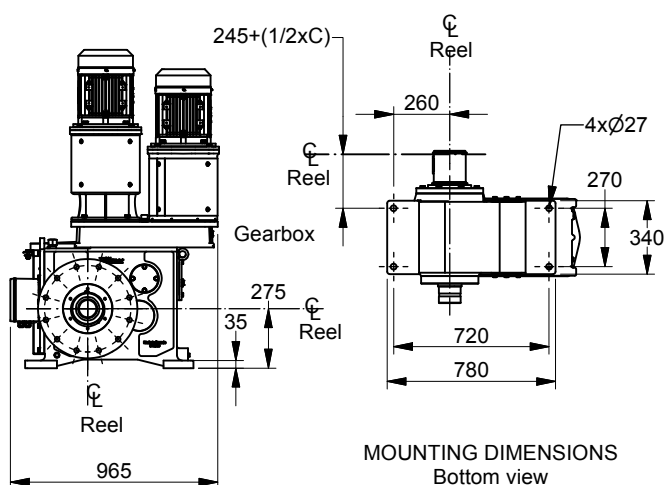

Document Template #710-101-62058

** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE **

Hillmar works have a fully registered ISO 9001-2008 quality assurance programme (QCB #01-1525)

Storm Brakes • Thruster Disc Brakes • Thruster • Industrial Disc Brakes • Hydraulic Power Units • Cable Reels

C:\TEMP\fa8a7f45-b658-4d37-a164-8e70aa1b049a\80000529326\HILLMAR\HILLMAR PRODUCTION\06 CABLE REEL\CABLE REEL DA0700-607006007 DACR\SPC-SHT-DACR\75905 DACR-ME25-GB50DD-ENC4-20-50.idw