Hillmar
Hillmar Industries Ltd.
7371 Vantage Way
Delta, BC V4G 1C9
P:604 946-7115 F:604 946-0329
info@hillmar.com www.hillmar.com

SPOOL SFGA
SFGA-GB25-1600-4600-24
SPECIFICATION SHEET
SLS & MKTG
ENGLISH

Sheet Number:	
Job Number:	
Form Number:	629-812-35937PT
Company / Project Reference:	Date.: / Page.: 1 OF 1 / Document Package No.: / Rev.:

Inventor Drawing

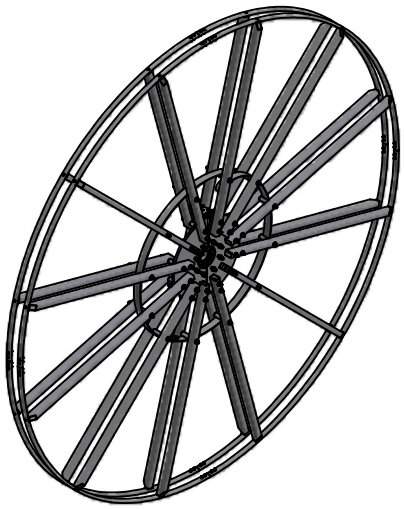

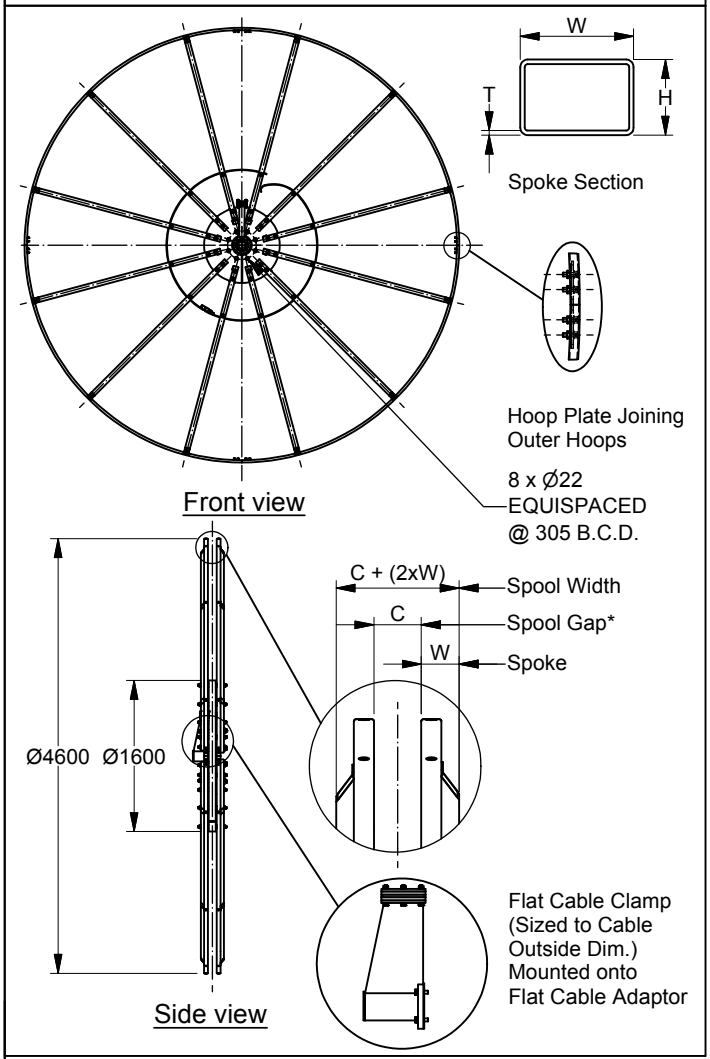

FEATURE	CODE
Spool Flat Galvanized	SFGA
Gearbox Size	GB25
Inside Diameter (mm)	1600
Outside Diameter (mm)	4600
Spoke Quantity	24

Example for ordering	SFGA-GB25-1600-4600-24

TECHNICAL DATA

Weight of Spool (kg)	492
Spoke W x H x T	75 X 50 X 3
Spool Gap (mm) C	* JOB SPECIFIC
Spool Width (mm)	C + (2 x W)
Mounting Holes	8 x Ø22
Mounting Bolts	8 x M20 x 80 DIN 931-10.9 DAC

NOMINAL SPECIFICATION

Spools are manufactured from standard components to form a modular bolted assembly.
This product is used for flat cable.
All structural fasteners are plated Gr. 10.9 bolts and all small non-structural fasteners are 304 stainless steel.
Standard spools are supplied with a hot dipped galvanized protective coating.

NOTES

Hillmar Spools can be customized to suit customer cable requirements.
All dimensions are in millimeters.
All figures given are nominal figures only.

C:\TEMP\ebeed48b-dfe1-4c56-9e15-9d931e8b4ebd\8000052939\HILLMAR\HILLMAR PRODUCTION\06 CABLE REELS\SPOOLS\0700-6\07006001 SGF-SGR\SPC-SHT-SGF-SGR\FLAT\35937 SFGA-GB25-1600-4600-24.idw

** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE **
Hillmar works have a fully registered ISO 9001-2008 quality assurance programme (QCB #01-1525)