Hillmar
Hillmar Industries Ltd.
7371 Vantage Way
Delta, BC V4G 1C9
P:604 946-7115 F:604 946-0329
info@hillmar.com www.hillmar.com

COUPLING RKSM
RKSM-260-MSS-LSH-0630-30-10300
SPECIFICATION SHEET
SLS & MKTG
ENGLISH

Sheet Number:	
Job Number:	
Form Number:	429-680-46893PT
Company / Project Reference:	
Date.:	
Page.:	1 OF 1
Document Package No.:	
Rev.:	

Inventor Drawing

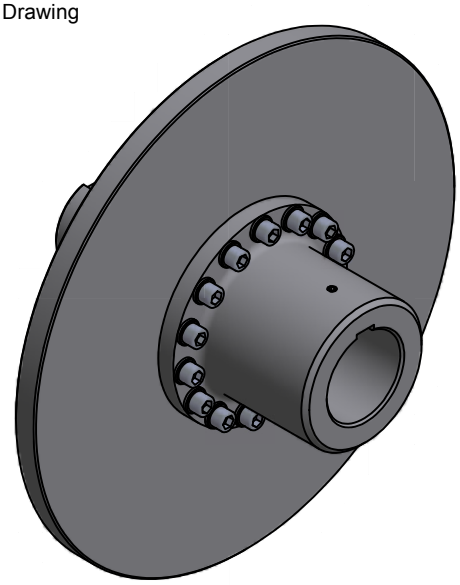

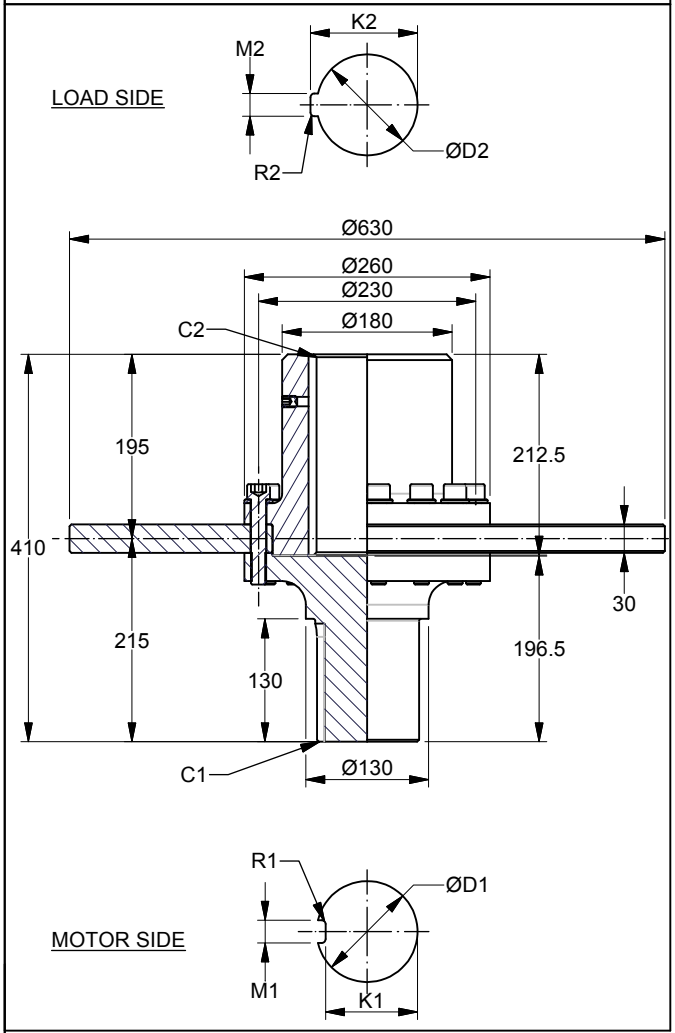

FEATURE	CODE
Rigid coupling	RKSM
Coupling size (Hub OD)	260
Motor side	MSS
Load side	LSH
Disc diameter (mm)	0630
Disc thickness (mm)	30
Maximum coupling torque (Nm)	10300

Example for ordering	**RKSM-260-MSS-LSH-0630-30-10300**

TECHNICAL DATA

Disc model	SDBD-0630-30-260
Disc diameter (mm)	630
Hub bore size MIN. (mm)	70
D1 MAX. (mm)	125
D2 MAX. (mm)	125
Moment of inertia (kgm^2)	3.950
Mounting bolts	15 x M16
Bolt tightening torque (Nm)	206
MAX. coupling torque TkMAX (Nm)	10300
MAX. coupling speed (RPM)	2600
Weight (kg)	123

CUSTOMER SPECIFICATIONS

Motor side	Load side
D1:_____mm	D2:_____mm
M1:_____mm	M2:_____mm
K1:_____mm	K2:_____mm
R1:_____mm	R2:_____mm
C1:_____mm	C2:_____mm

NOTES

Coupling balancing grade ISO 1940-G6.3 is guaranteed for all coupling parts.

All figures are nominal figures only

All dimensions are in millimeters

Document Template #710-101-62058

** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE **
Hillmar works have a fully registered ISO 9001-2008 quality assurance programme (QCB #01-1525)

C:\TEMP\a3f49bb3-e10c-4cd0-aed8-26c1c4c1b337\8000052827\8\HILLMAR\HILLMAR PRODUCTION\04 THRUSTER DB\0700-4\07004005 PKM-GKM-RKSM-RKX\SPC-SHT-PKM-GKM-RKSM-RKX\03 RKSM\46893 RKSM-260-MSS-LSH-0630-30-10300.idw