Hillmar
Hillmar Industries Ltd.
7371 Vantage Way
Delta, BC V4G 1C9
P:604 946-7115 F:604 946-0329
info@hillmar.com www.hillmar.com

SPOOL SRGA
SRGA-GB12-1200-2500-24
SPECIFICATION SHEET
SLS & MKTG
ENGLISH

Sheet Number:	
Job Number:	
Form Number:	629-811-35816PT
Company / Project Reference:	
Date.:	
Page.:	1 OF 1
Document Package No.:	
Rev.:	

Inventor Drawing

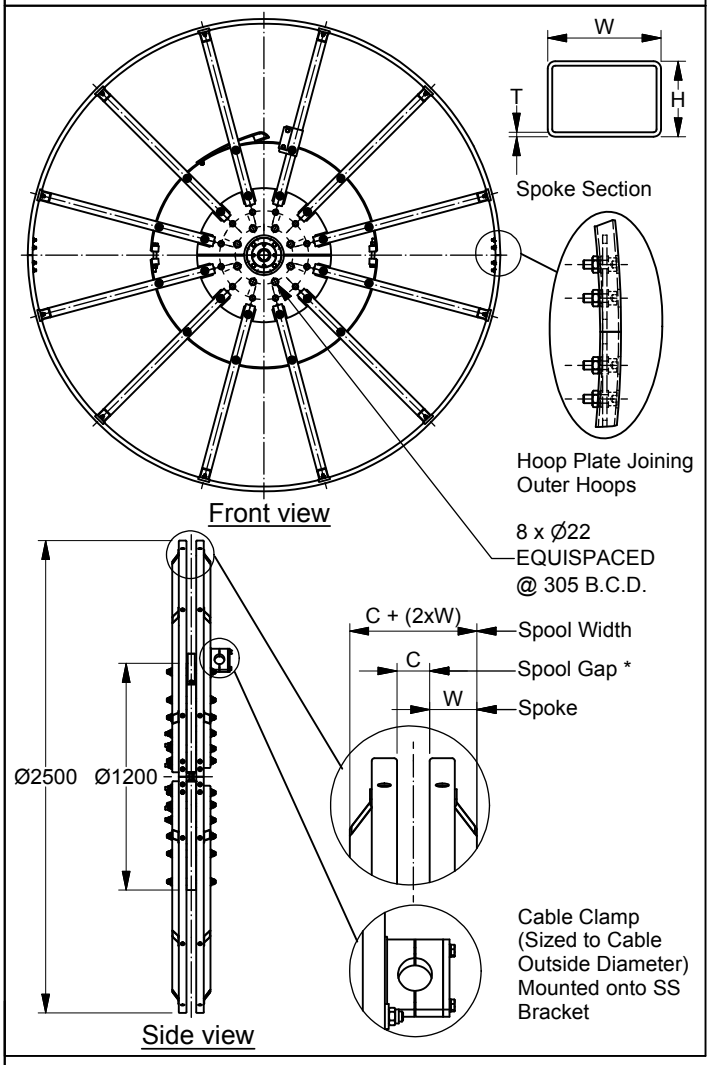

FEATURE	CODE
Spool Round Galvanized	SRGA
Gearbox Size	GB12
Inside Diameter (mm)	1200
Outside Diameter (mm)	2500
Spoke Quantity	24

Example for ordering	SRGA-GB12-1200-2500-24

TECHNICAL DATA

Weight of Spool (kg)	275
Spoke H	75 x 50 x 3
Spool Gap (mm) C	* JOB SPECIFIC
Spool Width (mm)	C + (2 x W)
Mounting Holes	8 x Ø22
Mounting Bolts	8 x M20 x 70 DIN 931-10.9 DAC

NOMINAL SPECIFICATION

Spools are manufactured from standard components to form a modular bolted assembly.
This product is used for round cable.
All structural fasteners are plated Gr. 10.9 bolts and all small non-structural fasteners are 304 stainless steel.
Standard spools are supplied with a hot dipped galvanized protective coating.

NOTES

Hillmar Spools can be customized to suit customer cable requirements.
All dimensions are in millimeters.
All figures given are nominal figures only.

C:\TEMP\b7421e19-5451-4a98-a399-916f534e8370\8000052397 2\HILLMAR\HILLMAR PRODUCTION\06 CABLE REEL\SPOOLS\0700-6\07006001 SGF-SGR\SPC-SHT-SGF-SGR\ROUND\35816 SRGA-GB12-1200-2500-24.idw

** ALL TECHNICAL DATA IS SUBJECT TO CHANGE WITHOUT NOTICE **
Hillmar works have a fully registered ISO 9001-2008 quality assurance programme (QCB #01-1525)